

ROLLO


ROLLUP 28 WT



The Rollup 28 WT tubular motor is maintenance-free and can be integrated into the smallest compact shaft dimensions.

Easy motor programming and increased shutdown accuracy thanks to electronic end position adjustment.
Flexible cable length thanks to plug coupling and extension cable.

TECHNICAL DATA

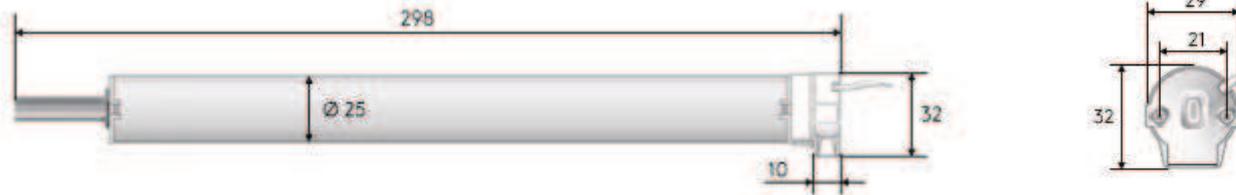


Manufacturer	SOMFY
Power supply	24 V DC
Power consumption	400 mA
Torque	0.8 Nm
Revolutions / min	30
Max. revolutions	60
Max. Duty cycle	6 min
Volume	57 dB
Operating temperature	-10 ° up to +85 ° C

Protection class	IP 30
Protection class	III
Mains cable	0,3 m + 2,2 m Verlängerungskabel; 2-polig; weiß/weiß-schwarz, JST Stecker/offene Kabelenden, Querschnitt: 2 x 0,5 mm ²
Weight	260 g
Article number	24.5181

SCHALTER


OPERATING PRINCIPLE



SUITABLE FOR SERIES

ELRO-S, ELKARO-S, ELKARO-M, ELDERO-S, ELDOROMO, ELDORO,
ELDOROCUBUS-I, ELDOROCUBUS-L, ELDOROCUBUS-U

WIRING DIAGRAM

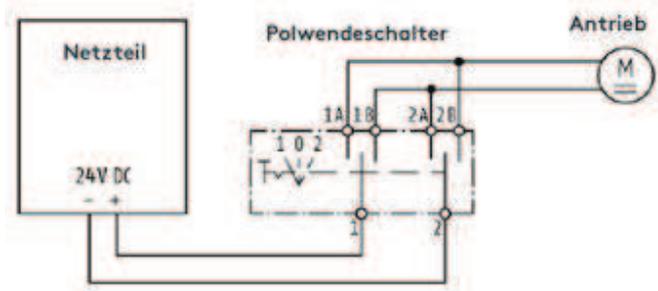

MOTOR CABLE COLOURS



Weiß/Schwarz = Laufrichtung 1
Weiß = Laufrichtung 2

! The direction of rotation depends on the polarity!