


ROLLO

SONESSE 40 WT 3/30



The Sonesse 40 WT plug-in drive is a motor specifically for indoor applications. Drive with single-phase capacitor and integrated limit switches on the motor head, brake, planetary gear and built-in thermal protection switch. With Sonesse technology as standard for particularly quiet operation.

TECHNICAL DATA




Manufacturer	SOMFY
Power supply	230 V AC
Power	95 W
Power consumption	440 mA
Torque	3 Nm
Revolutions /min	30
Max. revolutions	40
Max. Duty cycle	5 min
Volume	42 dB
Operating temperature	0 ° up to +60 ° C


Protection class	IP 44
Protection class	II
Mains cable	2,5 m; 3-polig weiß; offene Enden; Querschnitt 3 x 0,75 mm ²
Weight	1130 g
Article number	1810

SCHALTER

OPERATING PRINCIPLE

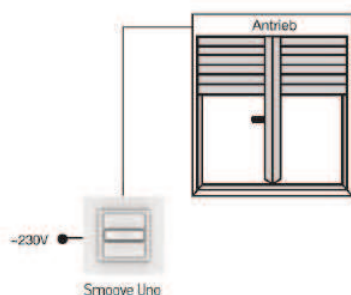

WIRING DIAGRAM



SUITABLE FOR SERIES

ELRO-M, ELRO-L, ELRO-XL, ELDERO-M, ELCUBUS-I, ELCUBUS-L, ELCUBUS-U, ELKARO-L, ELDOROMO, ELDOROCUBUS-I, ELDOROCUBUS-L, ELDOROCUBUS-U

MOTOR CABLE COLOURS



Blau = Nullleiter (N)
Braun = Leiter 1 (Laufrichtung 1)
Schwarz = Leiter 2 (Laufrichtung 2)

! Never control drives in parallel. Never control drives with an UP and DOWN signal at the same time. Pause between UP and DOWN command of at least 0.5 seconds.
Installations in the 230V range may only be carried out by authorized specialists.