
ROLLO


SONESSE 40 IO 3/30



The Sonesse 40 io drive is a universally applicable motor specifically for indoor applications. Drive with integrated radio receiver for interactive IO radio system with feedback, brake, planetary gear and built-in thermal protection switch. With Sonesse technology as standard for particularly quiet operation.

TECHNICAL DATA

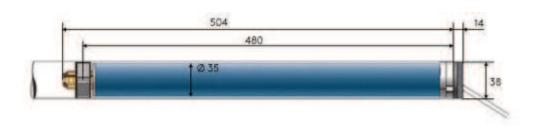



Manufacturer	SOMFY
Power supply	230 V AC
Power	95 W
Power consumption	440 mA
Torque	3 Nm
Revolutions / min	30
Max. revolutions	250
Max. Duty cycle	4 min
Volume	44 dB
Operating temperature	0 ° up to +60 ° C


Protection class	IP 31
Protection class	II
Mains cable	3m; 2-polig weiß; offene Enden; Querschnitt 2 x 0,75 mm²
Weight	1225 g
Radio system	SOMFY IO
Radio frequency	868-870 MHz
Article number	1813

FUNK

OPERATING PRINCIPLE



WIRING DIAGRAM



SUITABLE FOR SERIES

ELRO-M, ELRO-L, ELRO-XL, ELKARO-L, ELDERO-M, ELCUBUS-I, ELCUBUS-L, ELCUBUS-U, ELDOROMO, ELDOROCUBUS-I, ELDOROCUBUS-L, ELDOROCUBUS-U

MOTOR CABLE COLOURS



Blau = Nullleiter (N) Braun = Leiter (L1)



Installations in the 230V range may only be carried out by authorized specialists.