



ROLLO

SCREEN 40 UP 4.5/30



The Screen 40 UP 4.5/30 plug-in drive is a motor specifically for interior applications in the commercial sector. Tubular motor with single-phase capacitor and integrated end position switches on the motor head, brake, planetary gear and built-in thermal circuit breaker.

TECHNICAL DATA

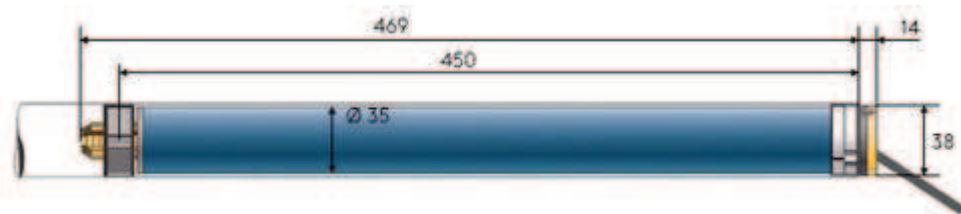


Manufacturer	SOMFY
Power supply	230 V AC
Power	110 W
Power consumption	520 mA
Torque	4.5 Nm
Revolutions /min	30
Max. revolutions	40
Max. Duty cycle	4 min
Volume	52 dB
Operating temperature	0 ° up to +60 ° C


Protection class	IP 44
Protection class	II
Mains cable	1 m; 3-polig schwarz, offene Enden, Querschnitt 3 x 0,75 mm ²
Weight	1070 g
Article number	45.1000

SCHALTER

OPERATING PRINCIPLE

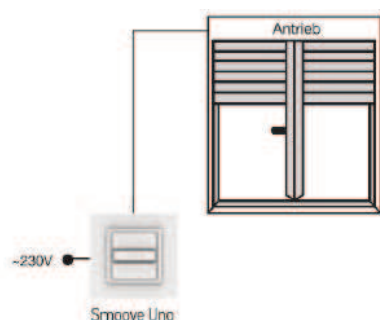


WIRING DIAGRAM



SUITABLE FOR SERIES

ELRO-M, ELRO-L, ELRO-XL, ELDERO-M, ELCUBUS-I, ELCUBUS-L, ELCUBUS-U, ELKARO-L, ELDOROMO, ELDOROCUBUS-I, ELDOROCUBUS-L, ELDOROCUBUS-U

MOTOR CABLE COLOURS



Blau = Nullleiter (N)
Braun = Leiter 1 (Laufrichtung 1)
Schwarz = Leiter 2 (Laufrichtung 2)

! Never control drives in parallel. Never control drives with an UP and DOWN signal at the same time. Pause between UP and DOWN command of at least 0.5 seconds. Installations in the 230V range may only be carried out by authorized specialists.