


ROLLO

POWerview 230V



The PowerView M40PV3G 330 motor is a 230 V tubular motor that was specially developed for roller blind applications. Drive with the latest transmission technology for smooth running characteristics. Integrated Bluetooth radio receiver for wireless control in PowerView networks.

TECHNICAL DATA

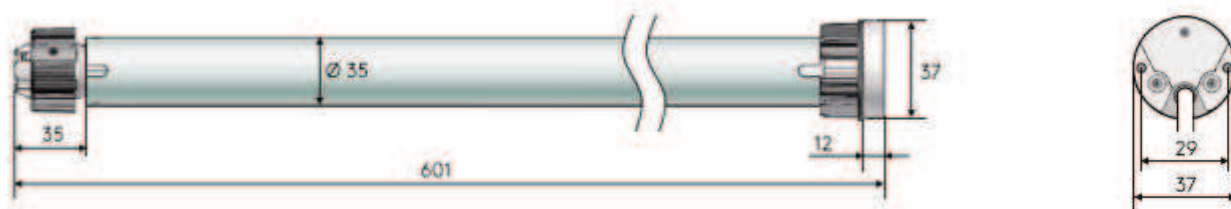

| | |
|-----------------------|---------------------|
| Manufacturer | Hunter Douglas |
| Power supply | 230 V AC |
| Power | 90 W |
| Power consumption | 400 mA |
| Torque | 3 Nm |
| Revolutions / min | 30 |
| Max. revolutions | 370 |
| Max. Duty cycle | 4 min |
| Volume | 40 dB |
| Operating temperature | -10 ° up to +60 ° C |

| | |
|------------------|---|
| Protection class | IP 30 |
| Mains cable | 2,5 m; 3-polig weiß; offene Enden; Querschnitt 3 x 0,75 mm ² |
| Weight | 1540 g |
| Radio system | Hunter Douglas Powerview |
| Radio frequency | Bluetooth 2,402-2,480 GHz |
| Article number | 45.8139 |

FUNK


OPERATING PRINCIPLE




SUITABLE FOR SERIES

ELRO-M, ELRO-L, ELRO-XL, ELKARO-L, ELDERO-M

WIRING DIAGRAM



MOTOR CABLE COLOURS



Blau = Nullleiter (N)
Braun = Leiter (L1)
Gelb-Grün = Schutzleiter (PE)

! Installations in the 230V range may only be carried out by authorized specialists.