


# ROLLO

## VESTAMATIC 230V



The VL-mm-230-35q/6nm plug-in drive is a maintenance-free tubular motor with integrated mechanical limit switches, brake, smooth-running planetary gear and thermal protection switch.

### TECHNICAL DATA

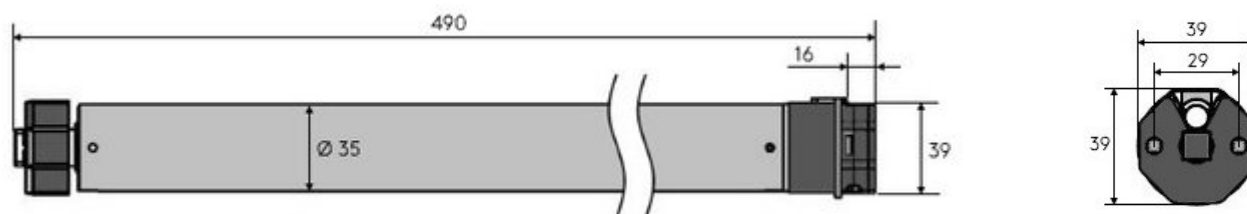


Manufacturer	Vestamatic
Power supply	230 V AC
Power	154 W
Power consumption	670 mA
Torque	6 Nm
Revolutions / min	28
Max. revolutions	30
Max. Duty cycle	4 min


Protection class	IP 44
Mains cable	2,5 m; 4-polig weiß/hellblau; offene Enden; Querschnitt 4 x 0,75 mm <sup>2</sup>
Weight	1500 g
Article number	24.9080

### SCHALTER

#### OPERATING PRINCIPLE

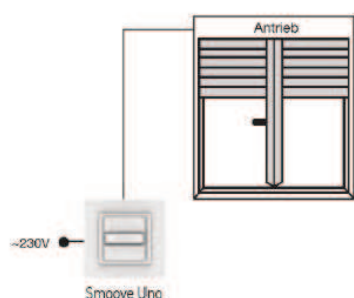


#### WIRING DIAGRAM

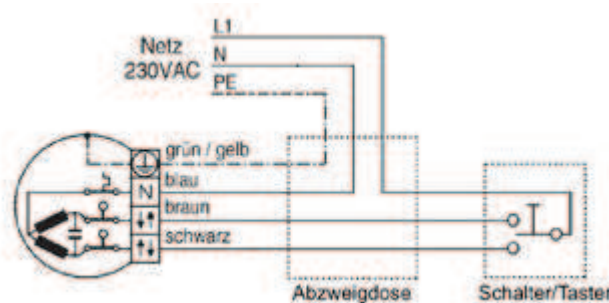

#### SUITABLE FOR SERIES

ELRO-M, ELRO-L, ELRO-XL, ELKARO-L, ELDERO-M, ELCUBUS-I, ELCUBUS-L, ELCUBUS-U

#### MOTOR CABLE COLOURS



Blau = Nullleiter (N)  
 Braun = Phase 1  
 Schwarz = Phase 2  
 Gelb-Grün = Schutzleiter (PE)

! Never control drives in parallel. Never control drives with an UP and DOWN signal at the same time. Pause between UP and DOWN command of at least 0.5 seconds.  
 Installations in the 230 V range may only be carried out by authorized specialists.