

ROLLO SPDERO-S



Design slow roller blind (soft raise) with metal design supports, with mounting profile as standard, optimum ease of use thanks to the patented "Softraise" delay technology.

1


Metal design carrier (anodized or color-painted surface), with mounting profile for clip mounting as standard

2

Operated by central pull and Birndl (standard), with handle on request

3

Outer base, anodized or color-painted surface

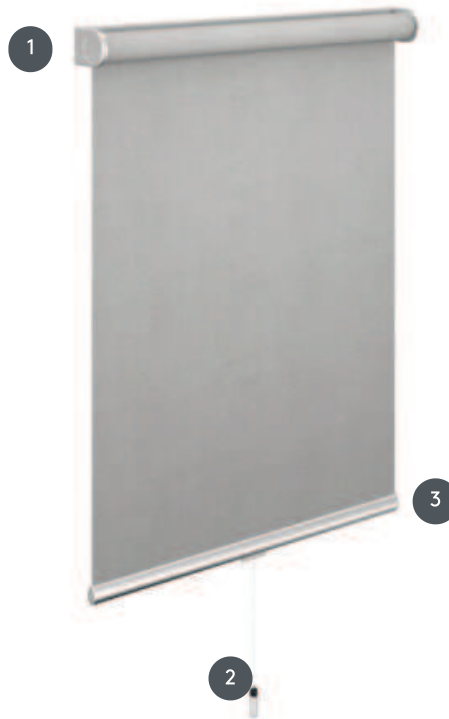

Mounting

ceiling or wall

min./max. dimensions

min. width 57 cm/max.
width 220 cm
max. height 250 cm
max. area 5.5 m²

Shaft diameter

31mm

Operation

with central pull (standard
Birndl or handle), gentle braking
when booting up and stepless
locking