


PLEATING

PL20SV6



SV6 pleated blind, tensioned, with handle Fixed tension cords - the system can also be mounted upside down (the curtain closes from top to bottom)

- ① Fixed top rail (min. 11.6 cm)
- ② Operating rail with handle (EOS standard metal handle or FUSION metal handle, FLEX plastic handle on request)
- ③ Operating rail with handle (EOS standard metal handle or FUSION metal handle, FLEX plastic handle on request)
- ④ Lower rail (fixed)

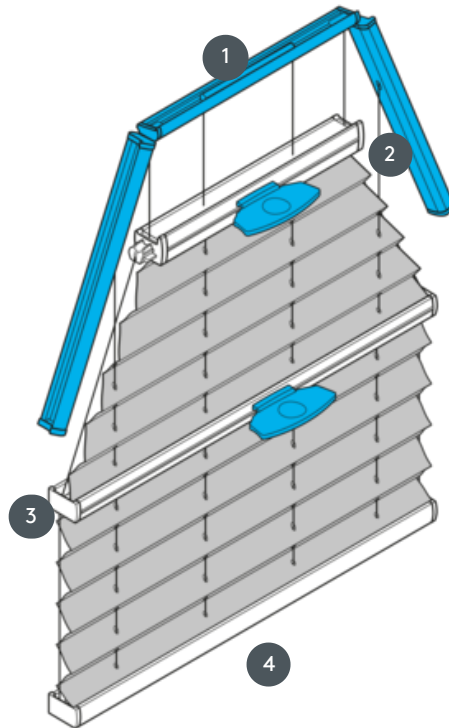

mounting type	min./max. mass	waiver	fabric color
screwed	min. baseline 50 cm/max. baseline 150 cm Maximum height dimensions: min. height 30 cm/max. height 250 cm	using handles on the operating rails	according to the latest collection