PLEATED BLINDS PL20PLV6



PLV6 pleated blind for hexagonal ceiling system with handle control. Fixed tension cables, distance approx. 20 cm. Unless otherwise stated, the trapezoid is at the top.

) Fixed top rail (min. 11.6 cm)

1

2


3

4

) FLEX plastic handle, foldable

) FLEX plastic handle, foldable

Fixed bottom rail

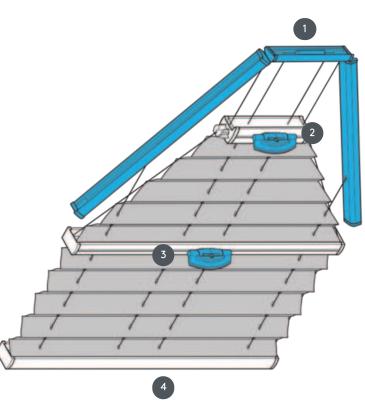

Mounting type

min./max. dimensions

either bolted or with mounting profile min. width 40 cm/max. width 120 cm

min. height 30 cm/max. height 250 cm by means of a control handle (if not reachable by hand, using the control rod)

Operation

Fabric colour

according to the latest collection