DUETS DU25SVDR2




Duets with handle control for triangle system. The system can also be mounted upside down.

Fixed top rail (min. 11.6 cm)

Central rail operable - EOS standard metal handle or FUSION metal handle, FLEX plastic handle on request

Fixed bottom rail

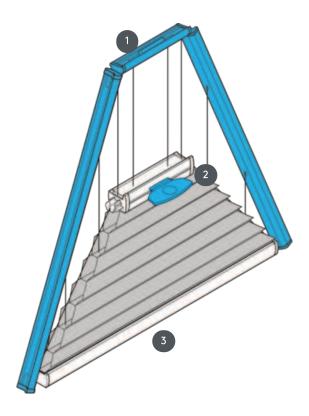

Mounting type

min./max. dimensions

screwed

1

2

3

min. baseline 15 cm/max. baseline 160 cm

min. height 10 cm/max. height 220 cm

max. area 2,2 m²

by means of handles on the sliding rails

Operation

Fabric colour

according to the latest collection