


# ROLLO

## POWerview 230V



The PowerView M40PV3G 330 motor is a 230 V tubular motor that was specially developed for roller blind applications. Drive with the latest transmission technology for smooth running characteristics. Integrated Bluetooth radio receiver for wireless control in PowerView networks.

### TECHNICAL DATA

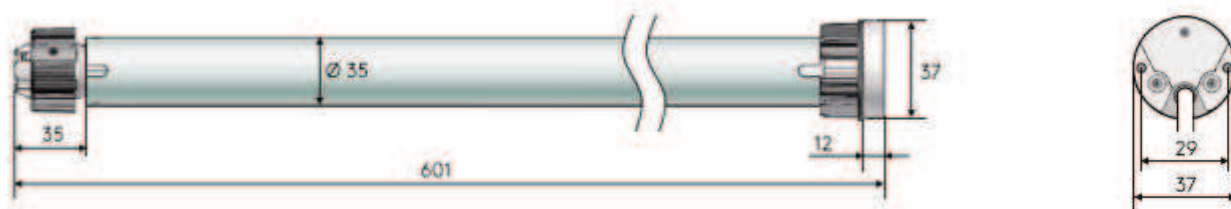

Manufacturer	Hunter Douglas
Power supply	230 V AC
Power	90 W
Power consumption	400 mA
Torque	3 Nm
Revolutions / min	30
Max. revolutions	370
Max. Duty cycle	4 min
Volume	40 dB
Operating temperature	-10 ° up to +60 ° C


Protection class	IP 30
Mains cable	2,5 m; 3-polig weiß; offene Enden; Querschnitt 3 x 0,75 mm <sup>2</sup>
Weight	1540 g
Radio system	Hunter Douglas Powerview
Radio frequency	Bluetooth 2,402-2,480 GHz
Article number	45.8139

### FUNK

#### OPERATING PRINCIPLE




#### WIRING DIAGRAM



#### SUITABLE FOR SERIES

ELRO-M, ELRO-L, ELRO-XL, ELKARO-L, ELDERO-M

#### MOTOR CABLE COLOURS



Blau = Nullleiter (N)  
Braun = Leiter (L1)  
Gelb-Grün = Schutzleiter (PE)

! Installations in the 230V range may only be carried out by authorized specialists.