


ROLLO POWERVIEW 230V



The PowerView M40PV3G 330 motor is a 230 V tubular motor that was specially developed for roller blind applications. Drive with the latest transmission technology for smooth running characteristics. Integrated Bluetooth radio receiver for wireless control in PowerView networks.

TECHNICAL DATA

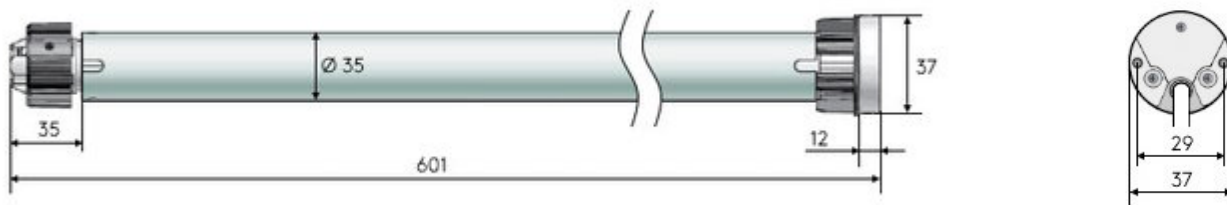

Manufacturer	Hunter Douglas
Power supply	230 V AC
Power	90 W
Power consumption	400 mA
Torque	3 Nm
Revolutions / min	30
Max. revolutions	370
Max. Duty cycle	4 min
Volume	40 dB
Operating temperature	-10 ° up to +60 ° C

Protection class	IP 30
Mains cable	2,5 m; 3-polig weiß; offene Enden; Querschnitt 3 x 0,75 mm ²
Weight	1540 g
Radio system	Hunter Douglas Powerview
Radio frequency	Bluetooth 2,402-2,480 GHz
Article number	45.8139

FUNK


OPERATING PRINCIPLE




SUITABLE FOR SERIES

ELRO-M, ELRO-L, ELRO-XL, ELKARO-L, ELDERO-M

WIRING DIAGRAM



MOTOR CABLE COLOURS



Blau = Nullleiter (N)
Braun = Leiter (L1)
Gelb-Grün = Schutzleiter (PE)

! Installations in the 230V range may only be carried out by authorized specialists.